


Clip-on shield 6500

Easy to mount clip-on EMI gasket with water seal



Clip-on EMI gaskets with water seal

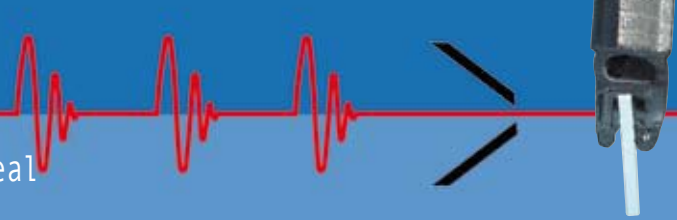

This range of easily mounted clip-on gaskets is composed of a separate sponge rubber water seal and an EMI-shielding side of highly conductive, wear-resistant metallized fabric. The construction is very flexible thanks to the hollow rubber, so a low closure force is guaranteed.

The gasket is assembled without tools, simply by pressing the section by hand onto the metal flange of your enclosure.

The gasket can be angled in two planes where a small radius is sufficient. Temperature range from -40°C to +110°C. A flame retardant version (UL94 V0) is also available (seen in the picture above).

Shielding Performance

Frequency Hz	Mode	Screening dB
1M	E	121
10M	E	110
100M	E	103
400M	E	98
1G	P	93
10 G	P	90

Shielding effectiveness depends on surface, shape of gaskets and material used.

See Guarantee



Dimensions

6590 Big clip-on shield	6585 Small clip-on shield	6595 Side clip-on shield

Different sizes and shapes are available on request.



Ordering information

Please indicate the profile number followed by the length in meters.

Profile

6585

Length (m)

10

6585 Small clip-on shield
6590 Big clip-on shield
6595 Side clip-on shield

Please specify the length in meters